



**NUS**  
National University  
of Singapore

**Computing**

**Eric Han**

[eric\\_han@nus.edu.sg](mailto:eric_han@nus.edu.sg)  
<https://eric-han.com>

*Computer Science*

6 August 2024

# Introduction to Unix/Linux

*CS1010 Workshop*

- 1 Why \*nix?
- 2 What is \*nix?
- 3 Linux Navigation
- 4 File Management
- 5 Terminal Basics
- 6 Vim Editor

## 7 Connect to Remote Server






Figure 1: Slides available - [https://eric-han.com/teaching/tools/nix\\_slides.pdf](https://eric-han.com/teaching/tools/nix_slides.pdf)

- › **[Pioneer JC 2010]** Took H2 Computing, interested in Computing/research.
- › You are here.
- › **[B.Com. NUS 2018]** Not so long ago I was in your shoes!
  - ›› A\*STAR Scholarship, Turing Programme
  - ›› [University of Southern California, 2016] Student Exchange
- › **[PhD. NUS 2023]** PhD in AI/ML.

You are welcome to check my profile & research: <https://eric-han.com>.

*Is it possible to use **only** Linux?*

## Operating Systems

- 1  Windows – since Primary 5, to play games that don't exist on Linux.
- 2  Linux – since JC, main driver.
  - » Fedora Linux
  - » NixOS
- 3  macOS – since BCom, to develop iOS/mac applications.

## Tools on Linux

- 1 Typesetting/PPT: Google Workspace, LibreOffice, T<sub>E</sub>X, Markdown
- 2 Coding Tools: vim, VScode



# Section 1: **Why \*nix?**



Figure 2: Image taken from Linux Inside ([Linux Inside 2017](#))



\*nix OS is the **dominant** Operating System (OS) in the tech world, and as a computing student, you will likely have to interface with one sometime in your career.

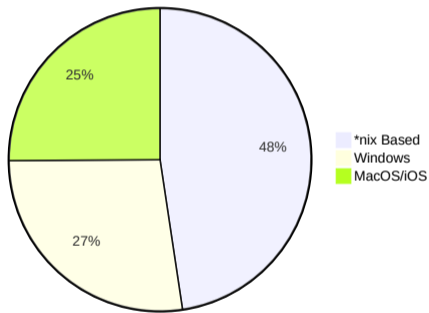


Figure 3: Primary OS ([Stack Overflow 2013](#))

\*nix is probably the most productive programming environment you can have to do most of your day-to-day tasks and to develop software as a computing professional.

### Install Node.js on Linux

```
# installs nvm (Node Version Manager)
```

```
curl -o-
```

```
↪ https://raw.githubusercontent.com/nvm-sh/nvm/v0.39.7/install.sh |
```

```
↪ bash
```

```
# download and install Node.js (you may need to restart the terminal)
```

```
nvm install 20
```

\*nix's programmability allows for easy automation of tasks to boost productivity by composing new tools from existing ones.

### Print in SoC

**Problem:** I need a command to print a PDF to a network printer.

```
#!/bin/bash
FILENAME=$( echo "$*" )
smbclient -U NUSSTF/username%password //nts09.comp.nus.edu.sg/psa427 -c
↪ "print \"$FILENAME\""
```

**Solution:** `$ soc-print hello.pdf`

# Reason 4 - Well-Designed

The Unix philosophy serves as a great example of how good software should be designed.

## SIMPLE HISTORY OF OS

github: @chococigar  
12/2020

note that this diagram is very simplified  
- internet online compatibility

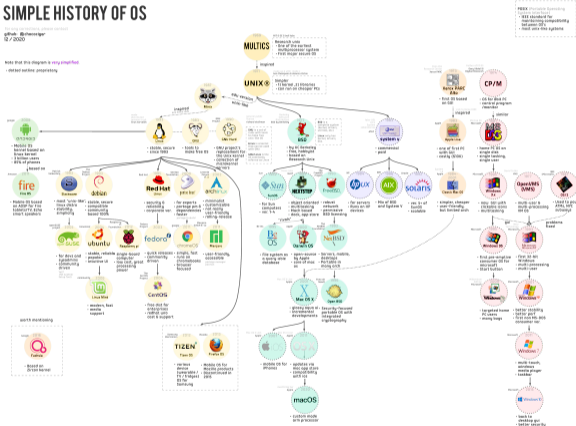


Figure 4: OS Family Tree (chococigar) – Most roads lead back to Unix.



## Section 2: **What is \*nix?**

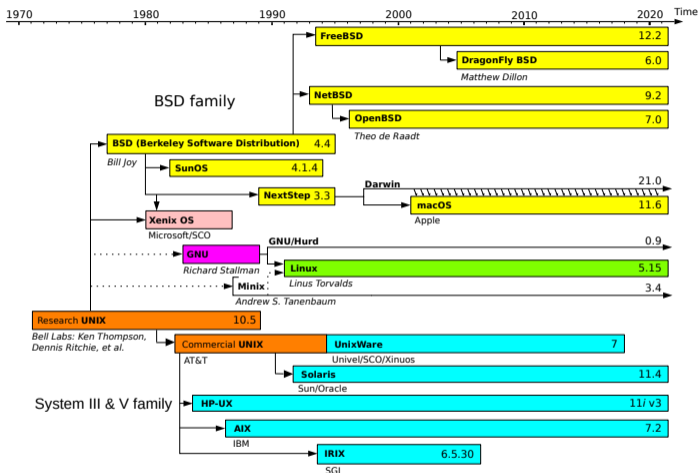


Figure 5: Abridged Timeline of Unix and Linux (Guillem 2021)

Unix is an OS that was developed in the late 1960s and the early 1970s, by Dennis Ritchie and Ken Thompson from Bell Laboratories.



Figure 6: Ken thompson (sitting) and Dennis Ritchie

Summarized by (Salus 1994) – Write programs

- › that do one thing and do it well.
- › to work together.
- › to handle text streams, because that is a universal interface.

Although it was well used by businesses & universities, it was **not free**.

*CLI is a text-based (simple and fast) way to instruct the computer to perform a task.  
We will use CLI as opposed to GUI to interface with nix in our exercises!*

Command-Line Interfaces (CLI)




Linux is actually GNU/Linux:

- › Linux kernel – initially developed from scratch as a hobby, by Linus Torvalds
- › GNU project (tools) – which aims to replace Unix, by Richard Stallman

Since, Linux it follows many Unix principles, we will now refer to the family as \*nix.



Figure 7: Linus Torvalds & Richard Stallman – edited (Brys 2012).

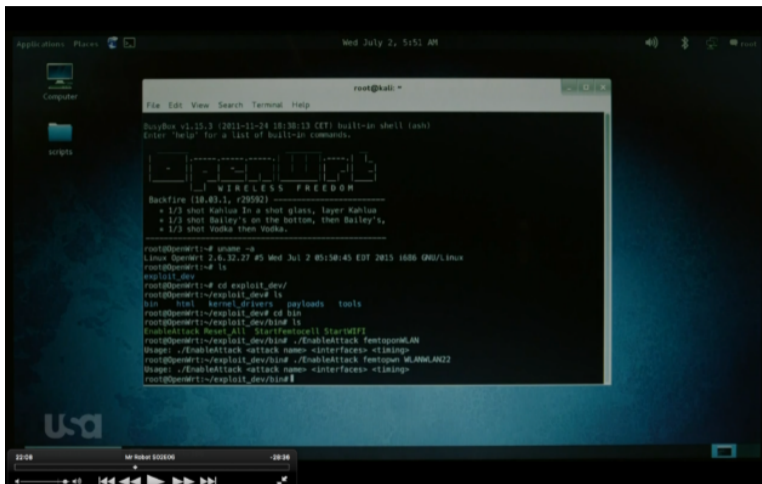

The screenshot shows a Linux desktop environment with a terminal window open. The terminal displays the following content:

```
root@kali: ~
File Edit View Search Terminal Help
DuckyBox v1.15.3 (2011-11-24 18:30:13 CET) built-in shell (ash)
Enter 'help' for a list of built-in commands.

+-----+
|   |   |   |   |   |   |   |   |   |   |
+-----+
WIRELESS FREEDOM




Backfire (10.03.1, r29592)
+ 1/3 shot Kahlua in a shot glass, layer Kahlua
+ 1/3 shot Bailey's on the bottom, then Bailey's,
+ 1/3 shot Vodka then Vodka.

root@OpenWrt:~# uname -a
Linux OpenWrt 2.6.32.27 #5 Wed Jul 2 05:50:45 EDT 2015 i686 GNU/Linux
root@OpenWrt:~# ls
exploit_dev
root@OpenWrt:~# cd exploit_dev/
root@OpenWrt:~/exploit_dev# ls
bin  httpd  kernel_drivers  payloads  tools
root@OpenWrt:~/exploit_dev# cd bin
root@OpenWrt:~/exploit_dev/bin# ls
EnableAttack  Reset_All  StartFestocell  StartWiFi
root@OpenWrt:~/exploit_dev/bin# ./EnableAttack festoponLAN
Usage: ./EnableAttack <attack name> <interfaces> <timing>
root@OpenWrt:~/exploit_dev/bin# ./EnableAttack festopwn WLANAN22
Usage: ./EnableAttack <attack name> <interfaces> <timing>
root@OpenWrt:~/exploit_dev/bin#
```

Figure 8: Screenshot from Mr. Robot, eps2.4\_m4ster-s1ave.aes




## Terminal (emulated) / Console (physical)

Program that takes keyboard inputs and prints text output to the user.

- >  Windows Terminal
- >  Terminal
- >  xterm, Console, konsole

## Shell

Program that interacts with the OS to executes commands (from terminal or scripts).

- >  Powershell (ps), MS-DOS (cmd)
- >  Bourne Shell (sh), Bourne Again Shell (Bash)
- >  Z shell (Zsh)

## Command Prompt

Where the user ( \$ ) or root ( # ) types a command, for the shell to execute a task:



```
[eric_vader@thinkpad:~]$
```













## Section 3: **Linux Navigation**



Since macOS is also part of the \*nix family, we focus on Windows vs \*nix:

	Windows	*nix
Organization	Usually <code>C:\</code>	Single 'root' <code>/</code>
Case	Case-insensitive	Case-sensitive
Path separator	<code>\</code>	<code>/</code>
Forbidden Characters	<code>&lt;&gt;:"/\\ ?*</code>	<code>/</code>
File System	NTFS,exFAT	UFS(Unix),Ext4(  ) ,APFS(  )
Hidden Files	File Property	Names starting with <code>.</code>

- › Home directory (user ehan):
  - ››  C:\Documents and Settings\ehan
  - ››  /home/ehan , /home/e/ehan
- › External media:
  - ››  Drives – C:\ , D:\
  - ››  /mnt , /media , /cdrom
- › Programs:
  - ››  C:\Program Files , C:\Program Files (x86)
  - ››  /opt , /usr , /sbin , /bin
- › Temporary directory (user ehan):
  - ››  C:\Users\ehan\AppData\Local\Temp
  - ››  /tmp , /var
- › Libraries:
  - ››  C:\Windows\System32 , C:\Windows\SysWOW64
  - ››  /lib , /lib64



- › Devices: `/dev`
- › Kernel (pseudo): `/proc` , `/sys` , `/dev`
- › Boot: `/boot`
- › Configuration: `/etc`
- › Site-Specific: `/srv`
- › Recovered files: `/lost+found`
- › Root home: `/root`

## Remark



Not all nix systems have every folder, but most include the essential ones.

Path is a unique location to a file/directory.

## Absolute Path

- >  Always starts with `C:\`
  - >> `C:\Windows\calc.exe`
- >  Always starts with `/`
  - >> `/bin/bash`

## Relative Path

- >  `calc.exe`
- >  `bash`

---

Symbol	Meaning
<code>~</code>	home directory
<code>.</code>	current working directory
<code>..</code>	parent directory

---



Print current Working Directory `pwd`

```
$ pwd  
/home/eric_vader
```

```
# pwd  
/root
```

## Remark (User vs Root prompt)

User prompt is denoted by ('\$') and root's is ('#'). Root can execute anything user can execute.

## LiSt content of a directory `ls`

```
$ ls
brother-HLL6200DW-cups-en.ppd Desktop Documents Downloads Music
↪ Pictures Public Templates Videos Workspace
```

## MaKe a subDIRectory `mkdir`

```
$ mkdir hello-world
$ ls
brother-HLL6200DW-cups-en.ppd Desktop Documents Downloads
↪ hello-world Music Pictures Public Templates Videos Workspace
$ ls -F
brother-HLL6200DW-cups-en.ppd Desktop/ Documents/ Downloads/
↪ hello-world/ Music/ Pictures/ Public/ Templates/ Videos/
↪ Workspace/
```

## Change Directory `cd`

```
$ cd hello-world/  
$ ls  
$ cd ..
```

## ReMove a subDIRectory `rmdir`

```
$ rmdir hello-world/  
$ rmdir hello-world/  
rmdir: failed to remove 'hello-world/': No such file or directory
```

### Remark (Rule of Silence)

Commands will not print unnecessary output.

**Demo** – We will be using a jslinux virtual machine in your (Chrome) browser, either:

- › [jslinux - Fedora33](#) [Try this first]
- › [jslinux - Buildroot](#) [backup]

Useful commands:

- › Print current Working Directory `pwd`
- › LiSt content of a directory `ls`
- › MaKe a subDIRectory `mkdir`
- › Change Directory `cd`
- › ReMove a subDIRectory `rmdir`

## In-lecture Activity (10 mins)

Create a folder 'hello-world' in the '/mnt' directory and delete the folder. Then figure out what is 'ls -l' displaying.



## Section 4: **File Management**



```
[root@desktop /root] # ls -l
total 558414

d rwxr-xr-x  5 root  root      1024 Dec 23 13:48 GNUstep
- rw-r--r--  1 root  root       331 Feb 11 10:19 Xrootenv.0
- rw-rw-r--  1 root  root       490 Jan  6 15:07 audio.cddb
- rw-r--r--  1 root  root 45254876 Jan  6 15:08 audio.wav
d rwxr-xr-x  2 root  root      1024 Feb 20 16:41 axhome
- rw-r--r--  1 root  root       900 Jan 18 20:15 conf
d rwxr-xr-x  2 root  root      1024 Dec 25 10:03 corel
- rw-r--r--  1 root  root       915 Jan 18 20:57 firewall
d rwxrwxr-x  2 root  root      1024 Jan  6 15:42 linux
d rwx-----  2 root  root      1024 Jan  4 02:19 mail
d rwxr-xr-x  3 root  root      1024 Jan  4 01:49 mirror
- rwxr--r--  1 root  root        29 Dec 27 15:07 openn
d rwxr-xr-x  3 root  root      1024 Dec 26 13:24 scan
d rwxrwxr-x  3 root  root      1024 Jan  4 02:34 sniff
```

<i>type</i>	<i>access modes</i>	<i># of links</i>	<i>owner</i>	<i>group</i>	<i>size (bytes)</i>	<i>modification date and time</i>	<i>name</i>
d	rwxr-xr-x	5	root	root	1024	Dec 23 13:48	GNUstep
-	rw-r--r--	1	root	root	331	Feb 11 10:19	Xrootenv.0
-	rw-rw-r--	1	root	root	490	Jan 6 15:07	audio.cddb
-	rw-r--r--	1	root	root	45254876	Jan 6 15:08	audio.wav
d	rwxr-xr-x	2	root	root	1024	Feb 20 16:41	axhome
-	rw-r--r--	1	root	root	900	Jan 18 20:15	conf
d	rwxr-xr-x	2	root	root	1024	Dec 25 10:03	corel
-	rw-r--r--	1	root	root	915	Jan 18 20:57	firewall
d	rwxrwxr-x	2	root	root	1024	Jan 6 15:42	linux
d	rwx-----	2	root	root	1024	Jan 4 02:19	mail
d	rwxr-xr-x	3	root	root	1024	Jan 4 01:49	mirror
-	rwxr--r--	1	root	root	29	Dec 27 15:07	openn
d	rwxr-xr-x	3	root	root	1024	Dec 26 13:24	scan
d	rwxrwxr-x	3	root	root	1024	Jan 4 02:34	sniff

Figure 9: Image taken from (McCarty 2017)

- › Type: Directory( `d` ), File( `-` ), Link( `l` )
- › Access Modes (User, Group, Others)
  - ›› User: Read Write Execute
  - ›› Group: Read Write Execute
  - ›› Others: Read Write Execute
- › Number of Links
- › Owner, eg. ehan
- › Group, eg. staff
- › Size (bytes)
- › Modification date and time
- › Name

## Remark (Links)

Links in linux is similar (but different) to shortcuts in Windows.

<code>&lt;permission&gt;</code>	effect on file	effect on directory
<code>r</code>	reading the content of a file	read the names of the files in the dir
<code>w</code>	writing into a file	create/delete/rename files in the dir
<code>x</code>	executing a file	access contents and meta-info of dir

**Changing File Permissions** `chmod <mode><action><permission> <name>`

`<mode>` ( `u` )ser, ( `g` )roup, ( `o` )thers, ( `a` )ll, with `<action>` `+`, `-`

Example: `$ chmod u+w hello.c`

## Remark (<>)

Don't key `<>`; it is common to use `<>` to specify an item!



## CoPy `cp`

```
$ cp hello.c hello1.c
$ ls
bench.py  hello1.c  hello.c
```

## MoVe / rename `mv`

```
$ mv hello1.c hello2.c
$ ls
bench.py  hello2.c  hello.c
```

## ReMove `rm`

```
$ rm hello2.c
$ ls
bench.py  hello.c
```

## CATenate file to screen `cat`

```
$ cat hello.c
/* This C source can be compiled with:
   gcc -o hello hello.c
*/
#include <stdlib.h>
...
```

In windows, executable binaries (usually) end with `.exe` but on linux it doesn't.

- 1 Create our own executable `$ gcc -o hello hello.c`. (Don't worry about this)
- 2 Check the executable created:

```
$ ls -l
total 148
-rw-r--r-- 1 root root 114 Dec 26 2020 bench.py
-rwxr-xr-x 1 root root 11656 Jul 12 16:27 hello
-rw-r--r-- 1 root root 185 Sep 9 2018 hello.c
```

- 3 Notice that `hello` is green and the `eXecute` permission is enabled.
- 4 Run the binary (Notice that `./hello` works but not `hello`):

```
$ ./hello
Hello World
```

Useful commands:

- › Print current Working Directory `pwd`
- › LiSt content of a directory `ls`
- › Change Directory `cd`
- › CoPy `cp`
- › MoVe / rename `mv`

## In-lecture Activity (5 mins)

Copy the 'ls' binary from '/bin/ls' to your home folder. Rename the binary to 'myls' and use 'myls' to list files in your home directory to examine the modification dates.



# Section 5: **Terminal Basics**



Special (key) commands to control programs (sorted by frequency):

- › `Ctrl` + `d` Exit/end of input to a program
- › `Ctrl` + `c` Terminate current program
- › `Ctrl` + `z` Suspend current program
  - › `fg` Bring suspended program into foreground
  - › `bg` Bring suspended program into background

Check `stty` for others, but these 3 are most used.

## Remark (Terminate vs Suspend)

`Ctrl` + `c` vs `Ctrl` + `z` are fundamentally different! Do not use suspend to terminate!

Equivalent to  `Ctrl` + `Alt` + `Del.` but on Linux:

- > `ps` List all processes
- > `jobs` List all jobs - processes by current shell
- > `fg` Bring suspended program into foreground
- > `bg` Bring suspended program into background
- > `kill` Send (kill) signal to a process
  - >> `pkill` Kill processes by name.
  - >> `kill` Kill processes by pid (Process ID).

## MANual `man`

The interactive manual for `ls`, `q` to quit.

```
$ man ls
```

## INFOmation `info`

Alternative to `man` but not widely adopted

```
$ info ls
```

## Help command `help` or Flag `-h`, `--help`

Many commands have implemented the help flag:

```
ls --help or help ls
```

## Remark (There is always Google)

You can also Google the command to check its documentation.



## Completing Commands

 when typing a command will autocomplete / list commands that matches:



```
$ a
addgroup  adduser  ar        arping   ash
addr2line animate  arp       as        awk
```

## Completing File Path

 when typing a file path will autocomplete / list paths that matches:

```
$ ls hello.
hello.c  hello.js
```

## Command History

Navigate through your terminal history: Later - , Eariler - 

There are several ways to compose commands, the main ways is via `;` and `&&`.

## Sequential Command Execution `;`

```
# cd /mnt; mkdir hello-world; ls; rmdir hello-world; cd ~
hello-world
...
```

## AND Short-circuit Execution `&&`

Run if the previous command is successful:

```
# cd /hello-world && ls
sh: cd: can't cd to /hello-world
```

## Output Redirection to file >

```
$ ls > out.txt  
$ cat out.txt
```

## Input Redirection from file <

```
$ cat < out.txt  
bench.py  
hello.c  
out.txt
```

## Output to Input for another program |

```
$ ls | cat
```

What is the difference between the 2 commands?

Hint: Try Suspending both commands and note the difference; Remember if you suspend, remember to kill the tasks using `pkill` to clean up!

### Command 1

```
$ sleep 10m && echo "Hello World" | cat > hw.txt
```

### Command 2

```
$ sleep 10m ; echo "Hello World" | cat > hw.txt
```

### In-lecture Activity (10 mins)

Find out what the commands 'sleep' and 'echo' does, and answer the question.



## Section 6: **Vim Editor**

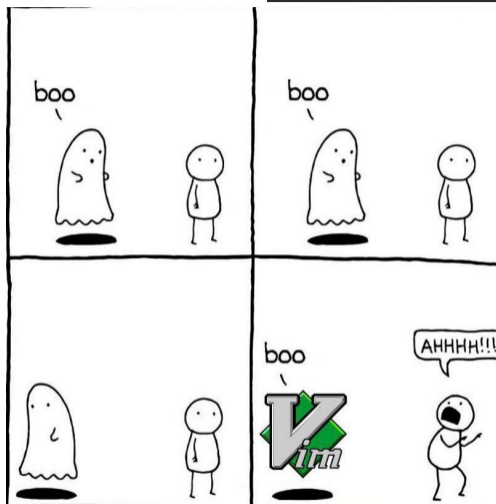


Figure 10: Image taken from devRant ([devRant 2018](#))

We will not comment on the other *respectable* text editor `emacs` but focus on `vim`:

- 1 Minimizing Hand Movements (ie. lazy..)
- 2 Multi-modal Editor
  - a. Normal mode: where you navigate, read / invoke other modes.
  - b. Insert mode: where you insert the text
  - c. Visual mode: where you highlight and manipulate text. (Not covered)
  - d. Command mode: where you issue commands.
- 3 Tell `vim` What You Want To Do; Don't Do It Yourself
- 4 Be A Good Unix Citizen

## Remark (Vim Advice)

Learn the smallest possible subset of vim well then moving on to more complex features.

## Navigation

- › LDUR: `←`, `↓`, `↑`, `→` – `h`, `j`, `k`, `l`
- › Word: previous, next – `b` `w`
- › Sentence: forward, backward – `(` `)`
- › Paragraph: forward, backward – `{` `}`

## Search

Search for a particular keyword: `/`, `?` followed by the keyword; `n` for the next match.

## Undo/Redo

`u` to undo, `Ctrl+r` to redo.



## Quit vim

To exit vim, `↑` + `z` + `z` to save and quit; `↑` + `z` + `q` to quit without saving.

## Other modes

Return to Normal mode: `Esc`.

- › Insert mode `-- INSERT --`
- › Visual mode `-- VISUAL --`
- › Command mode `:` `:`
- › Macro recording mode `recording @<a-z>` `q` + `a-z`
  - › ie. `q` + `a` - `recording @a`
  - › `q` to return to normal mode

- › Turn on line numbers `:set number`
- › Jump to line number `:<line number>`
- › Open another file `:e <filename>`
- › Help `:help <keyword>`
- › Save file `:w`
- › Save and quit `:wq`
- › Quit without saving `:q!`
- › Delete current line `:d`
- › Delete lines `:<start>,<end>d`
- › Run a command and insert the std output `:r! <command>`

There are different ways to enter insert mode:

- › `i` – insert before cursor
- › `I` – insert at start of line
- › `a` – insert after cursor
- › `A` – insert at end of line
- › `o` – add new line below cursor
- › `O` – add new line above cursor
- › `s` – substitute character
- › `S` – substitute line

## Subset I personally use regularly

---

- › LDUR: `←`, `↓`, `↑`, `→`
- › `u` to undo, `Ctrl+r` to redo.
- › `i` – insert before cursor
- › Turn on line numbers `:set number`
- › Jump to line number `:<line number>`
- › Delete current line `:d`
- › Save and quit `:wq`
- › Quit without saving `:q!`
- › Search `?` followed by the keyword; `n` for the next match

### Remark (Vim Advice)

Ignore the overwhelming list of shortcuts and learn a subset that you can quickly use!

```
#include <stdlib.h>
#include <stdio.h>

int main(int argc, char **argv)
{
    printf("Hello World!!!");
    return 0;
}
```

## In-lecture Activity (10 mins)

Edit 'hello.c' to as shown. Navigate to edit the line(s) via 3 ways: (1) use line number, (2) use search, (3) use LDUR. After every way, revert to original, save only on the last edit.



# Section 7: **Connect to Remote Server**



*Intuition (Remote Desktop):* It is like TeamViewer but (mainly) for CLI.

*Intuition (Layman):* It is like astral projection (ie. Luke Skywalker vs Kylo Ren in SW.)

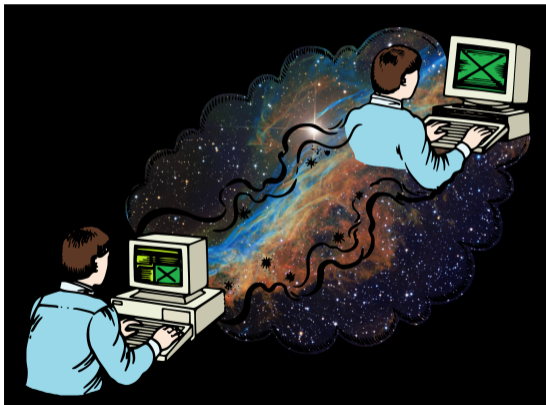


Figure 11: Image taken from Reddit ([ProgrammerHumor 2022](#))

On your *local* computer, connecting to a *remote* computer:

```
$ ssh <username>@<hostname>
```

- › `<username>` is your *remote* username
- › `<hostname>` is the address or hostname of the *remote* computer (server/host).

Here is an example of `ehan` connecting to `pe112.comp.nus.edu.sg`.

```
$ ssh ehan@pe112.comp.nus.edu.sg
```

```
The authenticity of host 'pe112.comp.nus.edu.sg (192.168.48.114)' can't  
↪ be established.
```

```
ED25519 key fingerprint is
```

```
↪ SHA256:tLCvBMgrxecahKilvHefU8lRH7r2PvIINmjqSVFAz68.
```

```
This key is not known by any other names.
```

```
Are you sure you want to continue connecting (yes/no/[fingerprint])?
```

```
↪ yes
```



The PE Hosts are only accessible in SoC networks, if you are outside:




```
$ ssh ehan@pe112.comp.nus.edu.sg
ssh: Could not resolve hostname pe112.comp.nus.edu.sg: Name or service
↪ not known
```

However, you may connect into SoC networks from outside by using [SoC VPN](#).


## Remark (SoC VPN vs NUS VPN)

NUS VPN gets you into NUS networks, not SoC's. So, use SoC VPN.

## Access SSH?

- 1  – [Linode Guide](#)
  - » **Recommended** Command Prompt (or PowerShell)
  - » Windows Subsystem for Linux
  - » PuTTY
- 2 / – `ssh` via Terminal/Console

## Access an Unix Terminal?

- 1  – Depending on your objective/constraints.
  - » Follow Access SSH guide to connect to a remote host.
  - » [Windows Subsystem for Linux](#)

### Remark (jslinux virtual machine)

Use jslinux for learning purposes, do not use it for your PE assignments.

# Copying to/from local/remote

We can copy ( `cp` ) files to/from local/remote: `$ scp <source> <destination>`

`<source>` / `<destination>` is the location of the resource:

- › If local, `<path>` , same as `cp`
- › If remote, it will be of the form `<username>@<hostname>:<path>`

## Local, Push File to Remote

```
[eric_vader@thinkpad:~]$ scp hw ehan@pe112.comp.nus.edu.sg:~
```

## Local, Pull File from Remote

```
[eric_vader@thinkpad:~]$ scp ehan@pe112.comp.nus.edu.sg:hw ./hw2
```

## Remote, Pull/Push to/from Local

```
ehan@pe112:~$ scp eric_vader@<local-hostname>:hw ./hw3
```

## Recap of what we learnt

- 1 Create a file using `vim`
- 2 Transfer to remote using `scp`
- 3 Remote connect to remote using `ssh`
- 4 Compile a program on remote
- 5 Run the program and pipe output to a file
- 6 Transfer the output to local using `scp`
- 7 Open locally using `vim`

## Some Improvements (Advanced)

Read/Watch and learn more:

- 1 [Setting up SSH Keys](#)
- 2 Use `screen` to create terminal 'tabs'

This lecture is based on; read in more detail:

- › [NUS SoC Unix@Home Workshop, 2021](#)
- › [CS1010 Lab Guides Documentation](#)

## Setting Up for Class

- 1 [Apply for SoC Unix account](#)
- 2 [Enable access for the compute cluster](#)
- 3 [Setup SoC VPN - enable VPN when outside SoC](#)
- 4 [How to access SSH - Slide 58](#)

Brys, Carlos. 2012.

<https://www.slideshare.net/slideshow/datos-abiertos-opendata/14913843>.

chococigar. <https://www.reddit.com/media?url=https%3A%2F%2Fpreview.redd.it%2Fe21s2vb3a2a81.png%3Fwidth%3D4613%26format%3Dpng%26auto%3Dwebp%26s%3Da2bc24827b9caf90eb0c85dae83893976a6d8183>.

devRant. 2018. “DevRant - Every Non Vim Users ( or Emacs!) — Devrant.com.”

<https://devrant.com/rants/1607005/every-non-vim-users-or-emacs>.

Guillem, Hotmocha, Wereon. 2021. “UNIX - Simple English Wikipedia, the Free Encyclopedia — Simple.wikipedia.org.” <https://simple.wikipedia.org/wiki/UNIX>.

Linux Inside. 2017. “Log into Facebook — Facebook.com.” <https://www.facebook.com/photo/?fbid=1832237733461345&set=a.781153315236464>.

McCarty, Bill. 2017. “Learning Debian GNU/Linux, 1999, o’rilly.”

- ProgrammerHumor. 2022. “How I Explain SSH to People That Don’t Have a Software Background.” [https://www.reddit.com/r/ProgrammerHumor/comments/y20xpa/how\\_i\\_explain\\_ssh\\_to\\_people\\_that\\_dont\\_have\\_a/](https://www.reddit.com/r/ProgrammerHumor/comments/y20xpa/how_i_explain_ssh_to_people_that_dont_have_a/).
- Salus, Peter H. 1994. *A Quarter Century of UNIX*. ACM Press/Addison-Wesley Publishing Co.
- Stack Overflow. 2013. “Stack Overflow Developer Survey 2023 — Survey.stackoverflow.co.” <https://survey.stackoverflow.co/2023/>.